



Change No.	Date	Description	Signature	Updated

SECTION NO. **CKCZ1017**

CLIENT NO.



1 : 2

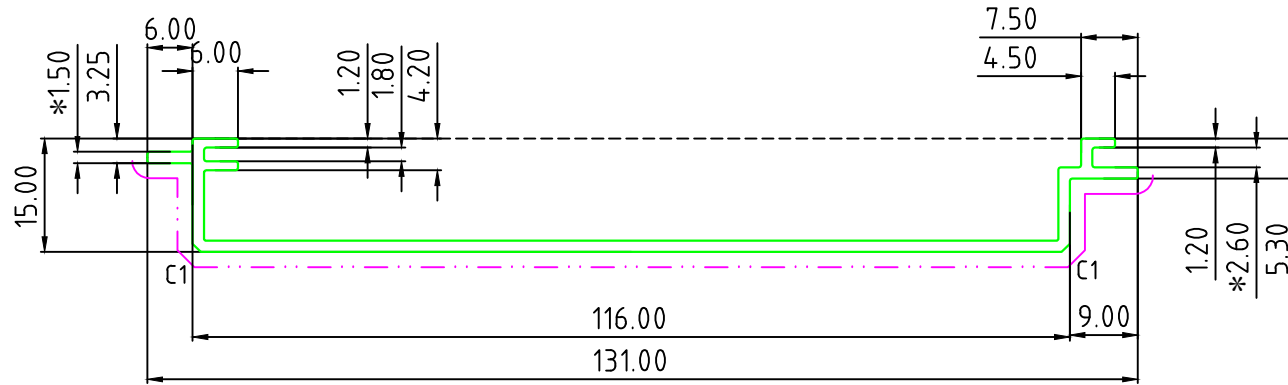

C1=1.06X45°
 Unspec. Corners:
 R0.30
 Unspec. Solid Wall Thickness:
 1.50±0.15
 Unspec. Hollow Wall Thickness:

Surface Treatment:
 "*"Indicates Critical Dimensions,
 Actual assembly prevail

--- Exposed Surface

Unit of Measure:mm

Test Standard:GB 5237-2008

All FR Denote Round.

Note:

- 1: This drawing is consistent with the sample or client's drawing, buyer is responsible for the patent and trademark.
- 2: If the profile need assembly with other profiles or accessories, please provide the accessories. If not, buyer take the risk if there is problem in assembly.
- 3: Please carefully check the drawing of the decoration line, the buyer signed the drawing is means that confirm decorative line.

ALLOY	6063-T5	AREA.(mm ²)	250.23
SCALE	1 : 1	IN PERIM.(mm)	
REF.NO.	EQ216261	OUT PERIM.(mm)	338.71
OUTRAD.NO.	∅132	EST.WT.(kg/m)	0.678



DESIGN		2017. 07. 26	ALU. TYPE	
COLLATE			ALU. NAME	
AUDITING			CLIENT NAME	
APPROVED				